

Implementation of a transmission line model for fast simulation of fluid flow dynamics

Stéphane Velut Hubertus Tummescheit
Modelon AB, Ideon Science Park, 22370 Lund, Sweden

Abstract

An implementation of a lumped and 1-dimensional pipeline model for simulation of fast pressure and flow transients such as water-hammer effects is presented. It is an extension of the classical Transmission Line Model (TLM), a transfer matrix representation of a pipeline, relating pressure and volume flow rates at the extremities of a pipeline. The proposed model has extended previous work in different aspects. The extensions were developed for the detailed operational investigation of a pipeline for the transport of carbon dioxide from a carbon capture plant to a suitable location for the geological storage of supercritical, dense phase carbon dioxide. A lumped temperature model, derived as the TLM model by integrating the distributed dynamics, has been added to describe the effect of heat losses in long pipelines. A dynamic friction model that is explicit in the medium and pipeline characteristics has also been included. Finally, it is shown that, with simple adjustments, the model can reasonably well describe the pressure dynamics in turbulent flow conditions. Some simulations have been carried out to compare the performance of the proposed model to the one from the Modelica Standard Library, and the results were also compared to measurement results from the literature. The resulting model has become useful for a wide variety of engineering applications: pipelines for gas and oil, district heating networks, water distribution networks, wastewater systems, hydro power plants and more. In the lumped, constant temperature version, there are no discretization artifacts, and even in the discretized version taking into account spatial and temporal changes in temperature, discretization artifacts are much smaller than for the standard finite volume model. Moreover, the short simulation times make the model suitable for real-time applications.

Keywords: water-hammer; transmission line model; dynamic friction; lumped model, CO₂ transport

1 Introduction

A pipeline is a distributed system and its dynamics is described by partial differential equations. Most of the methods to compute flow transients are based on a spatial discretization of the pipeline into small segments. For accurate simulations of long ducts, a high discretization level is necessary, which leads to time-consuming computations. When only pressure and flow at the extremities are of interest, it is possible to capture the pipeline dynamics with a low order lumped model. The paper presents the implementation of such a model, the Transmission Line Model, based on the work presented in [5]. The original model has been extended to include temperature dynamics, an improved dynamic friction model, the effect of static head and some handling of turbulent flow conditions. The model presented in this paper captures the oscillations of the wave equation accurately with a lumped model, under the assumption of constant or slowly varying fluid properties. For suitable assumptions, the model is both more accurate with respect to measurements and has a much faster execution time than discretized models. It is suitable for simulation of larger multi-domain systems with variable time-step solvers, and also for pipeline systems with long (hundreds of kilometers) pipes. In contrast to discretized models that include momentum dynamics, the TLM model works fast and reliably also for zero-flow conditions.

The model is used in Modelon's Hydraulics Library as the long-line model without the thermal effects, and in Modelon's CombiPlant Library including the thermal effects.

2 Background

2.1 Fundamental equations

One dimensional pressure and flow dynamics in a circular pipeline is described at low Mach numbers

($q/A \ll c$) by coupled partial differential equations:

$$\begin{aligned} \frac{\partial p}{\partial t} + \frac{\rho c^2}{A} \frac{\partial q}{\partial x} &= 0 \\ \frac{\partial q}{\partial t} + \frac{A}{\rho} \frac{\partial p}{\partial x} + f(q) &= 0 \end{aligned} \quad (1)$$

where q is the averaged flow rate at any section, p the pressure, ρ the medium density, c the speed of sound and A the cross-section area. The friction factor $f(q)$, which describes the pressure losses per unit of length is defined by:

$$f(q) = \frac{\tau_{wall}}{0.5 \times \rho u^2} \quad (2)$$

where $u = q/A$ is the fluid velocity and the wall shear stress τ_{wall} is related to the velocity gradient in the radial direction:

$$\tau_{wall} = \mu \frac{\partial u}{\partial y} \quad (3)$$

and μ is the dynamic viscosity of the fluid.

2.2 Friction model

The friction factor, which depends on the medium viscosity and on the flow regime may be experimentally derived or in some cases analytically computed on physical considerations. In the case of steady state flow, $f(q)$ is related to the Fanning friction factor $\lambda(q)$ by

$$f_s(q) = \lambda(q) \frac{\pi D u^2}{8} \quad (4)$$

When the flow is laminar, the Darcy-Weisbach equation $\lambda(q) = \frac{64}{Re}$, Re being the Reynolds number, leads to

$$f_s(q) = \frac{32\nu}{D^2} q \quad (5)$$

and the equations (1) are therefore linear. In the case of turbulent flow, the Fanning friction factor can be described by the Colebrook-White equation and the resulting equations (1) are not linear.

It is commonly assumed that the steady state relations for f are also valid dynamically, which is actually not the case during fast transients such as water-hammers. Indeed, under fast transients, the average flow is influenced by 2D effects that the static friction model does not capture well. In [8], the author derived a dynamic wall shear stress model $\tau_{wall}(q)$ by solving

analytically the two dimensional Navier-Stokes equations for laminar flow, which resulted in the following expression for f :

$$\begin{aligned} f(u) &= f_s(u) + f_u(u) \\ &= \frac{8\rho\nu}{R^2} u + \frac{\rho\nu}{R^2} \int W(t-\tau) \frac{\partial u}{\partial t} d\tau \end{aligned} \quad (6)$$

where the unsteady term f_u depends on the weighting function W with an analytical but irrational expression in the frequency domain. It was approximated in the time-domain for transient simulations with the method of characteristics. Zielke's approach was later extended to derive a dynamic friction model valid in turbulent regime, for smooth pipes [7] and rough pipes [2]. The resulting model is as in the laminar case described by an irrational transfer function, which is in that case also dependent on the Reynolds number.

2.3 Implementation

Time-domain methods

Fluid flow transients in a pipeline may be simulated using equation (1) together with a friction description and boundary conditions. Powerful commercial solvers implementing various Computational Flow Dynamics techniques such as Finite Element or Finite Volume methods, are available to numerically solve those equations. Most of the techniques are based on a spatial discretization of the pipeline into small segments. For an accurate result in case of long pipelines, many segments are required, resulting in long computation times. Another limitation is the difficulty to simulate multi-domain models with complex time-varying boundary conditions.

A simpler and well-established technique for fluid flow simulation is the method of characteristics (MOC), which transforms the PDE (1) into two sets of ODE that can successfully be solved by fixed-step solvers. The fixed connection between the spatial and the temporal discretizations is the main limitation of the MOC technique: it results in many segments when the pipeline is long and it cannot be connected to variable step-solvers.

Frequency-domain methods

The second type of approach is based on a representation of the pipeline in the frequency domain. This is a well-suited method for real-time simulations and for system analysis such as control design or dynamic optimization. The fundamental equations (1) are first

Laplace-transformed and thereafter analytically integrated over the pipe length L :

$$\begin{pmatrix} P(s) \\ Q(s) \end{pmatrix}_{x=L} = \begin{pmatrix} \cosh \Gamma(s)L & -Z_c(s) \sinh \Gamma(s)L \\ -\frac{\sinh \Gamma(s)L}{Z_c(s)} & \cosh \Gamma(s)L \end{pmatrix} \begin{pmatrix} P(s) \\ Q(s) \end{pmatrix}_{x=0} \quad (7)$$

The equations involve non-rational terms and cannot be efficiently implemented without approximation. Two approaches are found in literature: the modal description and the Transmission Line approach. In the modal description, the irrational functions are approximated as truncated sum of low order linear filters whereas the TLM approach makes use of both linear filters and time-delays. As the TLM model describes explicitly the inherent delay of the wave propagation it results in lower orders model than the modal description.

The pipeline model that is described in the current paper is based on [5]. A block diagram of the pipeline model is shown in Figure 1. Every block in the schematic representation has a well-defined interpretation:

- Z_c is the line impedance describing the immediate and local effect of a flow change on pressure. It is modelled by a static gain $\frac{\rho c}{\pi(D/2)^2}$
- $R(s)$ is the hydraulic resistance of the duct and determines the pressure drop to the flow at stationarity. It was described by $R(s) = \frac{R_0}{\kappa T s + 1}$ where $R_0 = \frac{\Delta p_\infty}{q_\infty}$
- $e^{-sT} = e^{-s \frac{L}{c}}$ is the delay associated to the time it takes for a pressure wave to travel through the pipeline at the speed of sound c .
- $G_f(s) = G_f^1(s)G_f^2(s)$ is a dynamic filter that models the attenuation of the pressure disturbance when the wave goes from one extremity to the other. $G_f^1 = \frac{s/\omega_2 + 1}{s/\omega_1 + 1}$ and $G_f^2(s)$ describe the effect of static and dynamic frictions, respectively. The frequencies ω_1 and ω_2 are given by $\omega_1 = c/(\kappa L)$ and $\omega_2 = \omega_1 e^{-\frac{R_0}{2Z_c}}$. G_f^2 needs to be optimized for every medium and pipeline characteristics.

3 A novel lumped pipeline model

The transmission line model [5] has been implemented in Modelica and further developped to describe the following characteristics:

- heat loss. When heat loss cannot be neglected, temperature is not constant throughout

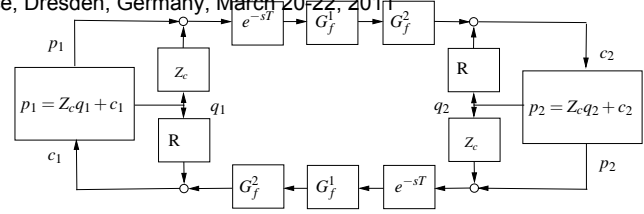


Figure 1: Schematic representation of the Transmission Line Model. Z_c is the line impedance, R is the hydraulic resistance, e^{-sT} is a time-delay and $G_f^1 G_f^2$ describes the effect on static and dynamic frictions on the travelling pressure waves.

the pipeline. The temperature profile and its influence on the pressure wave dynamics need to be included in the TLM model.

- static head, in the case of non-horizontal pipelines.
- an improved description of the dynamic friction
- turbulent flow

3.1 Turbulent flow condition

Linearity of the continuity and momentum equation is an essential assumption in the derivation of the transfer matrix representation. The turbulent flow regime introduces a nonlinearity in the friction term f and the coupled PDEs (1) can no longer be integrated explicitly. It is still possible to consider small deviations from an equilibrium point and linearize the equations (1) around a stationary point:

$$\begin{aligned} \frac{\partial \Delta p}{\partial t} + \frac{\rho c^2}{A} \frac{\partial \Delta q}{\partial x} &= 0 \\ \frac{\partial \Delta q}{\partial t} + \frac{A}{\rho} \frac{\partial \Delta p}{\partial x} + \frac{\partial f}{\partial q} &= 0 \end{aligned} \quad (8)$$

Moderate pressure and flow deviations from a stationary point can therefore be simulated by typically changing the hydraulic resistance R_0 in the TLM model with the linearized resistance R_l , which is a parameter used in both $R(s)$ and $G_f^1(s)$:

$$R_l = \frac{\partial p}{\partial q} = \frac{\rho L}{A} \frac{\partial f}{\partial q_{q_0}} \quad (9)$$

To get correct stationary pressure drops under larger pressure or flow changes, the parameter R_0 in $R(s)$ has not been linearized and $R_0 = \frac{\rho L}{q_0 A} f(q_0)$ has instead been used. Note that the changes for handling turbulent flows do not affect the original model in the laminar flow regime.

3.2 Dynamic friction

In the original TLM model from [5], the transfer function G_f^2 —describing the frequency dependent friction—needs to be tuned for the considered pipe and medium. To avoid this optimization, the friction model from [4] that is explicit in both the medium properties and the pipe characteristics has been implemented. In this model, the transfer function G_f^2 is expressed as a sum of k linear filters, approximating the analytical solution:

$$G_f^2(s) = 1 - \frac{8\nu L}{cD^2} \sum_{i=1}^k \frac{m_i \alpha s}{n_i + \alpha s} \quad (10)$$

where $\alpha = 4D^2/\nu$ and m_i and n_i are medium- and pipe-independent constants that affects the frequency range in which the approximation should be most accurate. Compared to [5] better agreement with experimental data has also been reported.

The friction description from [4] is theoretically valid only for laminar flow. In [1], it was found that the laminar flow approximation of the dynamic friction model is a reasonable basis for transient turbulent friction as long as the Reynolds number is moderate (below 10^5). The advantage of this model compared to [2] or [7] is that the dynamic friction model does not depend on the Reynolds number.

3.3 Static head

The basic pipeline model can easily be extended to account for pressure variations due to height differences. The equations at the pipe nodes are updated as follows

$$P_1 = Z_c Q_1 + C_1 - \rho g L \quad (11)$$

$$P_2 = Z_c Q_2 + C_2 + \rho g L \quad (12)$$

where ρ is the density of the medium at the pipe inlet, g is the gravity constant and L is the length of the pipe segment. In the previous equations it is assumed that the pipe node 1 is at a higher altitude than the pipe node 2.

3.4 Time-varying properties

Need for discretization

In the TLM model, it has been assumed that temperature is both constant in time and space. When heat loss along the duct is not negligible, this hypothesis is not valid and the variations in the medium properties cannot always be neglected. This is for instance true when the duct is very long or poorly isolated and when

the mass flow is time-varying or low. The pipeline needs somehow to be discretized into segments, each segment being characterized by uniform but possibly time-varying medium properties. The variations in the medium properties are however slow because the medium properties depend to a larger degree on temperature than pressure and temperature dynamics is slow.

To incorporate the temperature dynamics into the pipeline model, a similar approach as in the TLM model derivation has been used: the energy balance is explicitly integrated along the pipeline to get a relationship between the inlet and outlet temperature of every segment. In that way, the pipeline can be discretized into a moderate number of segments, each segment being the combination of a TLM model and a temperature dynamic. The segment length is typically much longer than in the MOC description and it is related to the amplitude of the temperature change along the line as well as to the sensitivity of the medium properties to temperature changes.

Lumped temperature dynamics

The one dimensional energy balance in the pipeline is represented by the following partial differential equation:

$$\frac{\partial T}{\partial t} + \frac{\dot{m}}{\pi R^2 \rho} \frac{\partial T}{\partial x} + \frac{1}{\pi R^2 \rho c_p} q(T(x)) = 0 \quad (13)$$

where $q(T(x))$ describes the heat loss to the surroundings along the line and depends on the boundary conditions. The heat loss may often be described as a linear function of the temperature difference between boundaries:

$$q(T(x)) = kS(T(x) - T_{boundary}) \quad (14)$$

where k is the heat conductivity of the surroundings (water, soil) and S is the shape factor. The shape factor S may take the following form [3]:

$$S = \frac{2\pi}{\text{acosh} \frac{2h}{D}} \quad (15)$$

for a pipe with diameter D , buried h meters below the ground surface at constant temperature, or

$$S = \frac{2\pi}{\ln \frac{D_\infty}{D}} \quad (16)$$

for a pipe with diameter D and surroundings at constant temperature, a distance $D_\infty/2$ away from the pipe center.

The equations (13) and (14) are linear and can be integrated explicitly together with the boundary condition from the inlet temperature:

$$T(x=0, t) = T_{in}(t) \quad (17)$$

When the mass flow is constant, it is sufficient to Laplace-transform (13) and integrate over the pipe length. An explicit solution to (13) can also be derived in the case of time-varying flows by applying the method of characteristics. Temperature at the outlet of a pipe with length L is then given by:

$$T(L, t) = T_{boundary} + (T_{in}(t - \tau) - T_{boundary})e^{-\frac{\tau}{T_p}} \quad (18)$$

The time-varying delay τ and the characteristic decay-time T_p are given by

$$\pi R^2 L = \int_{t-\tau(t)}^t \frac{\dot{m}(s)}{\rho} ds \quad (19)$$

$$T_p = \frac{c_p \rho \pi R^2}{kS} \quad (20)$$

3.5 Modelica implementation

The proposed pipeline model has been implemented in Modelica using the Dymola software. The basic pipeline segment, characterized by constant medium properties is composed of two models in parallel:

- a dynamic model describing pressure and flow dynamics, see Section 3.1 to 3.3
- a dynamic model describing temperature dynamics, see Section 3.4

The implementation of the pressure wave dynamics is done using linear transfer function blocks as shown in Figure 2. The implementation of the time-delays (associated with the wave propagation or the transport delay) is based on the external C-function called "transportFunction" available in Dymola. The functional equivalent of that function is currently considered in the Modelica Association to be included as operator `spatialDistribution()` into the Modelica language. This function allows to model delays based on a physical transport mechanism, like flow in a pipe, also in the case of bi-directional flow. Computation of the time-varying delay τ in the temperature dynamic is performed by using the differential form of Equation (19):

$$\frac{d\tau}{dt} = 1 - \frac{v(t)}{v(t - \tau)} \quad (21)$$

where $v = \frac{\dot{m}}{\rho}$ is the fluid velocity.

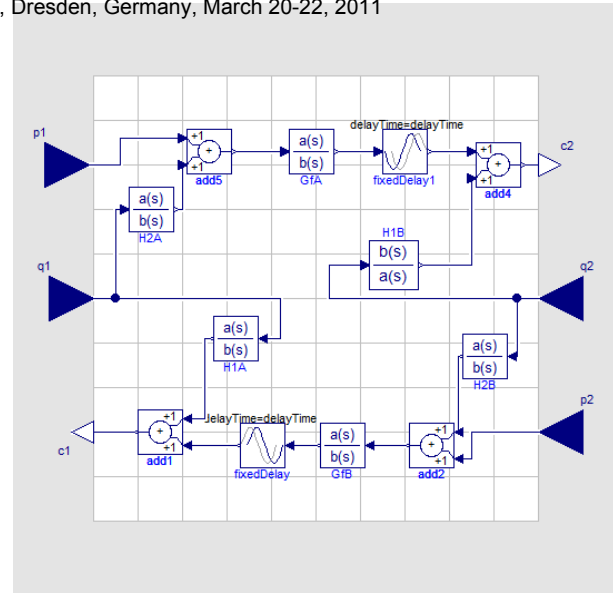


Figure 2: Implementation of the mass and momentum dynamics in Dymola.

4 Simulation

The original TLM model has shown very good agreement with experimental data and other pipeline models when the flow is laminar, see for instance [5] or [4].

4.1 Evaluation of the proposed model

Turbulent flow conditions

Simulations have been performed in Dymola to show that the proposed model gives reasonable results even in the case of turbulent flow and large pressure disturbances. The considered medium is water and the pipeline is characterized by a length of 1000 meters, a diameter of 0.035 meter and a relative roughness of 0.005. The pipe inlet is connected to an ideal flow source while its outlet is connected to an ideal pressure source ($p=20$ bar). Pressure waves are generated by fast variations of the inlet flow.

The TLM model is compared to an instance of the pipeline model from Modelica Standard Library with 50 segments. In the MSL pipeline model, the partial differential equations are treated with the finite-volume method and a staggered grid scheme for momentum balances. The dynamic friction model was not included in the simulation because it is not implemented in MSL. Note that such a friction model would give between 50 and 150 additional states in the MSL model (between 1 and 3 extra states per segment). Simulation results are shown in Figure 3. The pipeline is initially at rest and the flow at the inlet is

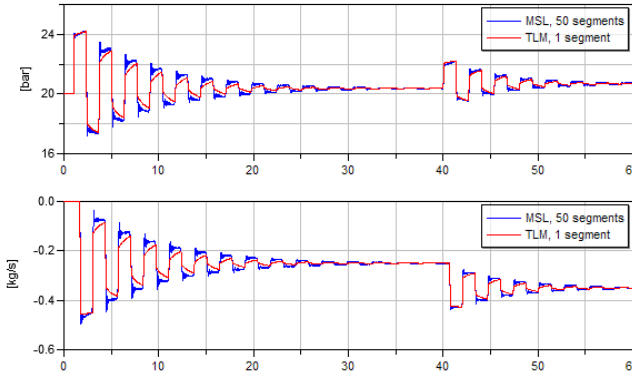


Figure 3: Comparison of the MSL and TLM pipeline models. Top: pressure at the inlet, bottom: mass flow rate at the outlet. The flow at the inlet is changed at $t=1s$ and $t=40s$.

varied at two time instants. The first flow increase, at $t = 1 s$, generates pressure waves of relatively large amplitude and moves the fluid in a very short time to the turbulent regime ($Re \approx 10^4$). Despite this fast and large transients into the turbulent regime, the performance of the TLM model is good:

- As expected, the frequency of oscillations is very good.
- The amplitude and the shape of the first peak is very good.
- The overall attenuation rate of the travelling wave is good. One can notice a slightly higher damping with the TLM model.
- The noisy signals in the MSL model due to the discretization artifacts are replaced with a smooth signal.
- The simulation time is much shorter with the TLM model: 8.6 instead of 100 seconds.

The second perturbation is smaller and results therefore in a better agreement between the models. A slightly higher damping can again be observed with the TLM duct model. To investigate whether the difference is mainly caused by the model structure or by the parameter values, the static friction term G_f^1 has been adjusted to give a slightly lower damping. For that sake, the frequency w_2 has been changed from $w_1 e^{-\frac{R_l}{2Z_c}}$ to $w_1 e^{-\frac{R_l}{3Z_c}}$. The results shown in Figure 4 are much better and confirms that the model structure may be suitable for turbulent flow simulations. Further analysis and simulations are however required to fully validate the model and to eventually derive a Reynolds

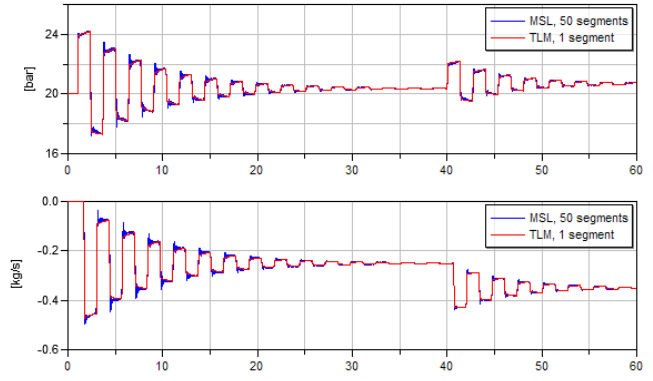


Figure 4: Comparison of the MSL and a slightly modified TLM pipeline models. Top: pressure at the inlet, bottom: mass flow rate at the outlet. The flow is changed at $t=1s$ and $t=40s$.

dependent parametrization of the transfer function G_f^1 .

Temperature dynamics

The reference model is again the pipeline model from MSL and the pipeline characteristics are identical to the ones given in previous section. Concerning the heat transfer, an ideal heat transfer described by a coefficient $\alpha = 10W/K/m^2$ has been chosen and the pipeline surroundings have been assumed to be at constant temperature $T_{boundary} = 10^\circ C$. The effect of changes in both the mass flow rate and the inlet temperature on the outlet temperature are investigated.

Simulation results are shown in Figure 5. The initial state is characterized by a mass flow rate of 0.25 kg/s and an inlet temperature of $23.4^\circ C$. The resulting outlet temperature at steady state is about $14.8^\circ C$ with both models. At time $t=0.25h$, the inlet temperature is linearly decreased to $1.5^\circ C$. The dynamic response of the TLM model differs substantially from the MSL model. In the MSL case, the outlet temperature starts decreasing before the cold water at the pipe inlet has been transported to the outlet. This is due to the spatial discretization of the pipeline model, which is equivalent to a mixing effect. The TLM model, implemented with a pure delay operator, does not present this mixing property and captures well the effect of the transport delay. When the number of nodes is increased the response of the MSL model tends towards the TLM solution, but at the cost of a longer simulation time. At time $t=2h$, the mass flow rate is decreased to 0.1 kg/s. It has a slow but immediate effect on the outlet temperature. The response of both models are compa-

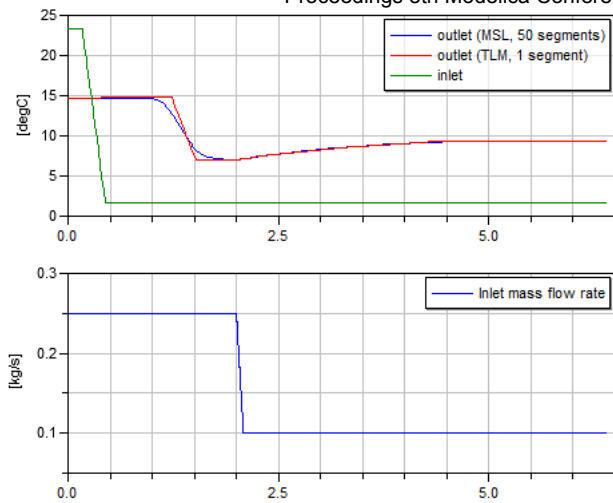


Figure 5: Temperature dynamics of the MSL and TLM pipeline models. Top: outlet and inlet temperatures. Bottom: inlet mass flow rate.

rable.

The simulation times are approximately 0.9 second for the TLM model and 63.0 seconds for the MSL model.

4.2 Application: transport of supercritical carbon dioxide

Successful implementation of the CO_2 capture and storage techniques is largely dependent on the success with which CO_2 can be economically and safely transported from the power plants to the storage sites. As safety is of paramount importance, any risks that may prevent the safe operation of CO_2 transport pipelines must be identified and subsequently eliminated or controlled. One of the risks is associated with the formation of gas phase CO_2 within the pipeline resulting from a decrease in pressure or increase in temperature. Two phase flow can lead to the occurrence of cavitation or water-hammer with the associated problems of noise, vibration and pipe erosion and ultimately, pipe failure.

The pipeline model presented in the current paper has been used to investigate how the physical state of CO_2 is affected during normal and failure modes such as quick shut-down, compressor stop or load changes, see [6].

5 Conclusion

A lumped pipeline model for fast simulation of pressure and flow transients in pipelines has been pre-

sented. It is an extension of the classical Transmission Line Model, a transfer matrix representation of a pipeline characterized by constant medium properties and laminar flow conditions. The proposed model has extended the basic TLM model to describe the influence of heat losses. A dynamic friction model that is explicit in the medium and pipeline characteristics has also been included. Finally, it is shown that, with simple adjustments, the model can reasonably well describe the pressure dynamics in turbulent flow conditions. Some simulations have been carried out to compare the performance of the proposed model to the one from the Modelica Standard Library. It turns out that the model accuracy is satisfactory and that the short simulation time makes it suitable for real-time applications. The model has also been applied to simulate different operation modes in a CO_2 transfer pipeline.

References

- [1] H. Kuo-Lun A. E. Vardy, J. M. B. Brown, *A weighting function model of transient turbulent pipe friction*, Journal of Hydraulic research **31** (1993), no. 4.
- [2] J. M. B. Brown A. E. Vardy, *Transient turbulent friction in smooth pipe flows*, Journal of Sound and Vibration **259** (2003), no. 5, 1011 – 1036.
- [3] T. L. Bergman-A. S. Lavine F. P. Incropera, D. P. Dewitt, *Introduction to heat transfer*, John Wiley & Sons, 2007.
- [4] D. N. Johnston, *Efficient methods for numerical modeling of laminar friction in fluid lines*, Journal of Dynamical Systems, Measurement and Control **128** (2006).
- [5] S. Gunnarsson P. Krus, *Distributed simulation of hydromechanical systems*, Third Bath International Fluid Power Workshop.
- [6] M. T. P. Mc Cann-H. Tummescheit S. Velut S. Liljemark, K. Arvidsson, *Dynamic simulation of a carbon dioxide transfer pipeline for analysis of normal operation and failure modes*, 10th International Conference on Greenhouse Gas Technologies, 2010.
- [7] A. E. Vardy and J. M. B. Brown, *Transient turbulent friction in fully rough pipe flows*, Journal of Sound and Vibration **270** (2004), no. 1-2, 233 – 257.

- [8] W. Zielke, *Frequency dependent friction in transient pipe flow*, Ph.D. thesis, University of Michigan, 1966.